


# S951

The S951 tyre employs large blocks with deep grooves which have strong resistance to puncturing, chunking, and provide excellent traction. The groove design effectively reduces stone retention to improve casing protection and tread life. The tyre is especially useful on poor road conditions.

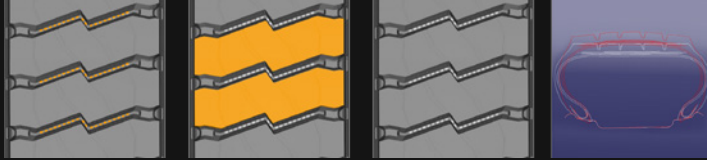

**Features & Benefits:**

- The bottom of the groove is reinforced with small ribs to reduce stone retention and protect the tyre casing.
- Tread compound formulation improve puncture, cut, and scratch resistance.

Size	L.I.	S.R.	P.R.	T.D.	RIM	O.D.	S.W.	Std. RIM	L.C.C.		RR	WG	NG DB	NG
									Single	Dual				
									kg	kg				
315/80R22.5	156/150/154	K(L)	18PR	270	22.5	1968	1076	*	3350@850	*	POR	*	*	*

\* Data available on request