




# TERRAMAX



The NEW Terramax A/T 3PMS is designed to deliver superior traction for SUVs, pickups and vans, both off and on the road. The NEW Terramax A/T 3PMS provides the same exceptional handling, on-and-off-road stability and quiet, comfortable ride as the original Terramax A/T with the added bonus that it is winter tyre tested and approved!

### PERFORMANCE RATINGS:

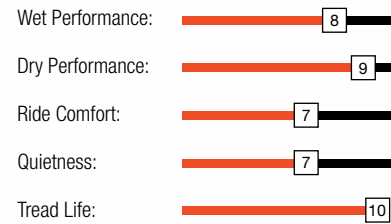


The **TERRAMAX A/T** is designed to deliver superior traction for SUVs, pickups and vans both off and on road. The A/T provides exceptional handling and on-and-off-road stability while maintaining a comfortable ride.

- Aggressive open shoulder tread design expels water, snow, slush and mud for optimum traction in all terrain conditions.
- Solid centre rib provides superior comfort and control.
- Extra deep tread sipes at varying angles improves comfort without sacrificing traction.



**Tread Pattern:** Effectively removes gravel and is capable of withstanding punctures from harsh pavements. The pattern protects the tread from damage.

**Staggered Tread Blocks** Can effectively prevent uneven wear to improve off-road performance.



- High Strength
- Cut and Puncture Resistant
- High Wear Resistance
- Strong grip
- Great Hydroplaning Resistance
- Low Rolling Resistance
- Highly Elastic at Low Temperatures
- Excellent Winter Performance
- Exceptional Driving Safety
- Low Heat Buildup
- Long Tread Life



### TERRAMAX A/T

#### Downward Claw-like Shoulder Design

Domineering style that effectively dissipates heat when driving long distances and at high speeds.

#### Sidewall Rim Protector

A shield design protects the alloy rims from collisions, impacts, and supports the sidewall.

#### Three-dimensional Peak Sidewall Design

Strengthens the sidewall to improve abrasion resistance.



**Aggressive open shoulder tread design:** efficiently expels snow, water, slush, and mud for optimum traction in all-terrain conditions.



**Multi-directional sipe system:** Extra deep tread sipes at varying angles improve comfort without sacrificing traction.



**Solid centre rib:** Provides superior comfort and handling.





# TERRAMAX A/T

Outlined White Letter  
 LT225/75R16 LT235/85R16 LT265/70R18  
 275/55R20 275/60R20 LT275/65R20 \*Black Sidewall

Rim	SIZE	LI	SR	XL	Labelling	Tread Depth (mm)	Standard RIM (inch)	Section Width (mm)	Overall Diameter (mm)	Max Load (kg)	Pressure (kpa)	SW	Rim Protector
15	235/75R15	109	S	XL	E/C/72/2	10.5	9J	235	733	1030	340	OWL	-
15	215/75R15	100	S	-	E/C/72/2	10	8J	216	703	800	300	OWL	-
15	235/70R15	103	S	-	E/C/72/2	10.5	8J	240	711	875	300	OWL	-
15	265/70R15	112	S	-	E/C/73/2	10.5	5J	272	753	1120	300	OWL	-
16	235/70R16	106	S	-	E/C/72/2	10.5	8 1/2J	240	736	950	300	OWL	-
16	265/70R16	112	T	-	E/C/73/2	10.5	8 1/2J	272	778	1120	300	OWL	-
16	275/70R16	114	S	-	E/C/73/2	10.5	9J	279	792	1180	300	OWL	-
16	245/75R16	111	S	-	E/C/72/2	10.5	8 1/2J	248	774	1090	300	OWL	-
16	265/75R16	116	S	-	E/C/73/2	10.5	9 1/2J	267	804	1250	300	OWL	-
16	LT265/75R16	123/120	S	-	E/B/73/2	13	7J	267	804	1550/1400	550	OWL	-
16	LT285/75R16	126/123	R	-	E/B/73/2	13	6 1/2J	286	834	1700/1550	550	OWL	-
16	245/70R16	107	S	-	E/C/72/2	10.5	8J	248	750	975	300	OWL	-

Rim	SIZE	LI	SR	XL	Labelling	Tread Depth (mm)	Standard RIM (inch)	Section Width (mm)	Overall Diameter (mm)	Max Load (kg)	Pressure (kpa)	SW	Rim Protector
17	265/70R17	115	S	-	E/C/73/2	10.5	8J	272	804	1215	300	OWL	-
17	235/65R17	104	S	-	E/C/72/2	10.5	9 1/2J	240	738	900	300	OWL	-
17	245/65R17	107	S	-	E/C/72/2	10.5	9 1/2J	248	750	975	300	OWL	-
17	265/65R17	112	S	-	E/C/73/2	10.5	9 1/2J	272	776	1120	300	OWL	-
17	275/65R17	115	S	-	E/C/73/2	10.5	8J	279	790	1215	300	OWL	-
18	275/65R18	116	T	-	E/C/73/2	10.5	8J	279	815	1250	300	OWL	-
18	LT265/70R18	124/121	R	-	E/B/73/2	13	7J	272	829	1600/1450	550	BSW	-
18	LT275/65R18	123/120	R	-	E/B/73/2	13	7J	279	815	1550/1400	550	OWL	-
18	LT275/70R18	125/122	R	-	E/B/73/2	13	7 1/2J	279	843	1650/1500	550	OWL	-
20	275/55R20	117	T	XL	E/C/73/2	10.5	7 1/2J	284	810	1285	340	BSW	-
20	275/60R20	115	T	-	E/C/73/2	10.5	7 1/2J	279	838	1215	300	BSW	-
20	265/50R20	111	T	XL	E/C/73/2	10.5	4.50B	277	774	1090	340	OWL	-
20	LT275/65R20	126/123	R	-	E/B/73/2	13	7J	279	866	1700/1550	550	BSW	-