



ULTRA HIGH PERFORMANCE TYRE




ATREZZO ZSR RUN-FLAT

PERFORMANCE RATINGS:




ATREZZO ZSR RUN-FLAT

Run-flat tyres (RFT), also known as "self-supporting run-flat tyres," are an important safety feature for any vehicle. A Run-flat tyre is built with a thicker sidewall to help support the tyre shape after losing air. This allows the tyre to continue to run safely, but at a limited speed and mileage. When normal tyres are punctured, they can instantly lead to a severe sidewall collapse; in the event of a collapse, the vehicle loses its only support which can cause the vehicle's centre of gravity to change instantaneously. RFT helps to lessen the severity of a flat tyre and allows you to get to the closest destination safely.

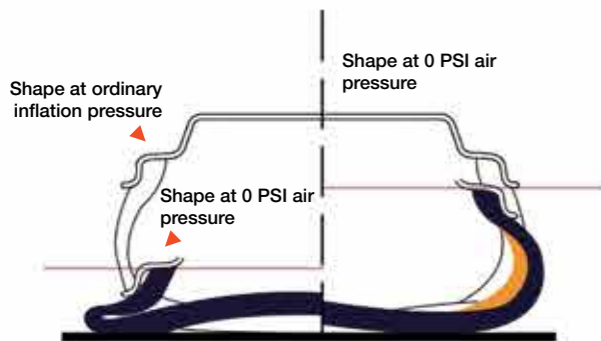

This is where run-flat tyres come in; after the tyre begins leaking air, the sidewall maintains its shape in order to continue to support the weight of the vehicle.

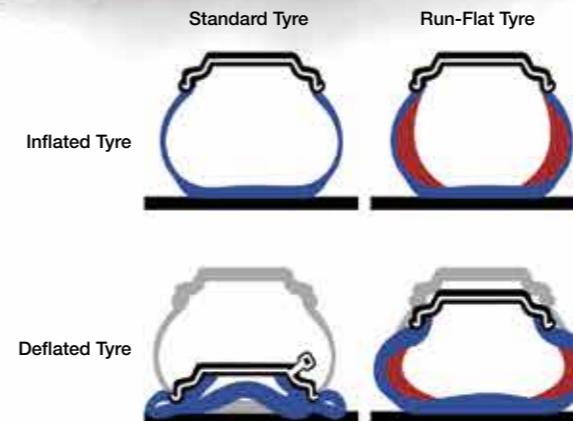

RFT Product Features:

1. Greater safety and the driver will not be delayed or stranded on remote highways because of a flat tyre.
2. Avoid accidents caused by the loss of control from punctures or air leaks: When the tyre is flat, even if all the air pressure has leaked from the tyre, the vehicle will continue to drive at normal speeds without having to be replaced immediately.
3. Even when your tyre begins leaking air you can drive to your local tyre dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.

Rim	SIZE	LI	SR	XL	Labelling	Tread Depth (mm)	Standard RIM (inch)	Section Width (mm)	Overall Diameter (mm)	Max Load (kg)	Pressure (kpa)	SW	Rim Protector
16	195/55RF16	87	V	-	E/C/71/2	8.2	5 1/2J	201	620	670	300	BSW	-
16	205/55ZRF16	91	W	-	E/C/70/2	8.3	6J	214	632	615	300	BSW	-
17	225/50ZRF17	94	W	-	E/B/71/2	8.2	6J	233	658	545	300	BSW	-
17	205/45RF17	84	V	-	E/C/71/2	8.2	6J	206	616	500	300	BSW	-
17	205/45RF17	88	W	XL	E/C/71/2	8.2	6J	206	616	560	340	BSW	-
17	205/50ZRF17	89	W	-	E/C/71/2	8.2	6J	214	638	580	300	BSW	-
17	225/45ZRF17	91	W	-	E/B/71/2	8.2	6J	225	634	615	300	BSW	-
17	225/45ZRF17	91	Y	-	E/B/71/2	8.2	6J	225	634	615	300	BSW	-
17	225/55ZRF17	97	Y	-	E/B/71/2	8.2	6J	233	680	730	300	BSW	-
18	225/40ZRF18	92	Y	XL	E/B/71/2	8.2	6J	230	637	630	340	BSW	-
18	245/40ZRF18	97	Y	XL	E/B/71/2	8.2	6J	248	653	730	340	BSW	-
18	255/35ZRF18	90	Y	-	E/B/72/2	8.2	6J	260	635	600	300	BSW	-
19	225/35ZRF19	88	W	XL	E/B/71/2	8.2	7J	230	641	560	340	BSW	-
19	245/40ZRF19	98	Y	XL	E/B/71/2	8.2	6J	248	679	750	340	BSW	-
19	245/40ZRF19	94	Y	-	E/B/71/2	8.2	6 1/2J	248	679	670	300	BSW	-
19	275/35ZRF19	96	Y	-	E/B/71/2	8.2	6 1/2J	278	675	710	300	BSW	-
19	275/35ZRF19	100	Y	XL	E/B/71/2	8.2	6J	278	675	800	340	BSW	-