




STUDDABLE WINTER TYRE



ICE BLAZER WST1



PERFORMANCE RATINGS:

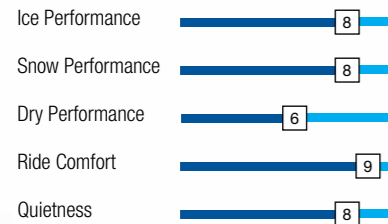

The **ICE BLAZER WST1** is a studdable winter tyre designed for drivers that demand maximum traction in severe winter weather conditions, letting you outperform the elements to get more out of the winter season.

- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Specially formulated tread compound allows the tread rubber to maintain flexibility for exceptional performance in extreme cold temperatures. Improved safety and handling in winter weather conditions (indicated with the Severe Service Emblem).
- Specially blended tread rubber formula for excellent grip in low temperatures.




ANTI-SKID PROPERTY



Special Buffer Layer

Special rubber buffer layer at the bottom of the stud absorbs the impact force of snow to prevent the falling out of studs.

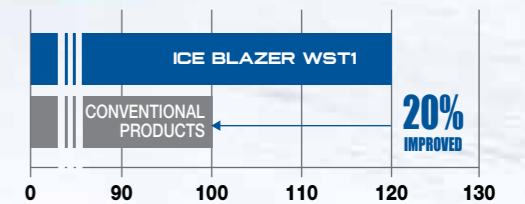

Innovative Square Design

Increases the ground contact area of the tyre to effectively improve grip performance and increase skid resistance.



Cold-Resistant Tread Rubber

Tread formula compounds ensure the tyre maintains elasticity and softness in extreme cold weather conditions. This improves grip on ice and snow, improves hydroplaning resistance, and lowers rolling resistance.



V-shaped Tread Design

Improved grip on ice and snow, skid resistance, and effectively reduces noise emissions.

Sipe Design

Optimised sipe design ensures greater grip on ice and snow.

Improved Studded Technology

12 rows of studs are designed to maximise grip and traction performance for safer driving in winter weather.

Sipe Design

Optimised depth and length of sipes maintain tread rigidity and greatly enhances grip and handling.



Rim	SIZE	LI	SR	XL	Labelling	Tread Depth (mm)	Standard RIM (inch)	Section Width (mm)	Overall Diameter (mm)	Max Load (kg)	Pressure (kpa)	SW	Rim Protector
13	155/70R13	75	T	-	F/C/71/2	10	8J	157	548	387	300	BSW	NO
13	155/80R13	79	T	-	F/C/71/2	10	7J	157	578	437	300	BSW	NO
13	165/70R13	79	T	-	F/C/71/2	10	7J	170	562	437	300	BSW	NO
13	175/70R13	82	T	-	F/C/71/2	10	4.50B	177	576	475	300	BSW	NO
14	155/65R14	75	T	-	F/C/71/2	10	9 1/2J	157	558	387	300	BSW	NO
14	165/65R14	79	T	-	F/C/71/2	10	8J	170	570	437	300	BSW	NO
14	175/65R14	82	T	-	F/C/71/2	10	4.50B	177	584	475	300	BSW	NO
14	175/65R14C	90/88	Q	-	E/B/72/2	10	4.50B	177	584	600/560	375	BSW	NO
14	175/70R14	84	T	-	F/C/71/2	10	5J	177	602	500	300	BSW	NO
14	185R14C	102/100	Q	-	E/B/72/2	10	5J	188	650	850/800	450	BSW	NO
14	185/60R14	82	T	-	F/C/71/2	10	5J	189	578	475	300	BSW	NO
14	185/65R14	86	T	-	F/C/71/2	10	5J	189	596	530	300	BSW	NO
14	185/70R14	88	T	-	F/C/71/2	10	5J	189	616	560	300	BSW	NO



ICE BLAZER WST1

Rim	SIZE	LI	SR	XL	Labelling	Tread Depth (mm)	Standard RIM (inch)	Section Width (mm)	Overall Diameter (mm)	Max Load (kg)	Pressure (kpa)	SW	Rim Protector
15	185/60R15	84	T	-	F/C/71/2	10	5J	189	603	500	300	BSW	NO
15	185/65R15	88	T	-	F/C/71/2	10	5 1/2J	189	621	560	300	BSW	NO
15	185/55R15	82	T	-	F/C/71/2	10	5 1/2J	194	585	475	300	BSW	NO
15	195/60R15	88	T	-	F/C/72/2	10	5 1/2J	201	615	560	300	BSW	NO
15	195/65R15	91	T	-	E/C/72/2	10	5 1/2J	201	635	615	300	BSW	NO
15	195/70R15C	104/102	Q	-	E/B/72/2	10.5	6J	201	655	900/850	450	BSW	NO
15	205/65R15	94	T	-	E/C/72/2	10	6 1/2J	209	647	670	300	BSW	NO
15	225/70R15C	112/110	Q	-	E/B/72/2	10.5	6J	228	697	1120/1060	450	BSW	NO
15	215/70R15	98	T	-	E/C/72/2	10	6J	221	683	750	300	BSW	NO
15	215/65R15	96	T	-	E/C/72/2	10	6 1/2J	221	661	710	300	BSW	NO
15	205/70R15	96	T	-	E/C/72/2	10	6 1/2J	209	669	710	300	BSW	NO
15	205/70R15C	106/104	R	-	E/B/72/2	10.5	6J	209	669	950/900	450	BSW	NO
15	215/70R15C	109/107	R	-	E/B/72/2	10.5	6J	221	683	1030/975	450	BSW	NO
15	175/65R15	84	T	-	F/C/71/2	10	6J	177	609	500	300	BSW	NO
15	235/75R15	105	S	-	E/C/72/2	11	9 1/2J	235	733	925	300	BSW	NO
16	205/60R16	92	T	-	E/C/72/2	10	6 1/2J	209	652	630	300	BSW	NO
16	205/55R16	91	T	-	E/C/72/2	10	6J	214	632	615	300	BSW	NO
16	225/60R16	98	T	-	E/C/72/2	10	6J	228	676	750	300	BSW	NO
16	215/60R16	95	T	-	E/C/72/2	10	6J	221	664	690	300	BSW	NO
16	215/55R16	97	H	XL	E/C/72/2	10	6 1/2J	226	642	730	340	BSW	NO
16	215/65R16	98	T	-	E/C/72/2	10	7 1/2J	221	686	750	300	BSW	NO
16	205/65R16C	107/105	Q	-	E/B/72/2	10.5	7J	209	672	975/925	475	BSW	NO
16	195/60R16C	99/97	S	-	E/B/72/2	10.5	7 1/2J	201	640	775/730	375	BSW	NO
16	215/65R16C	109/107	R	-	E/B/72/2	10.5	7 1/2J	221	686	1030/975	475	BSW	NO
16	195/65R16C	104/102	R	-	E/B/72/2	10.5	7J	201	660	900/850	475	BSW	NO
16	195/75R16C	107/105	Q	-	E/B/72/2	10.5	8J	196	698	975/925	475	BSW	NO
16	235/65R16C	115/113	R	-	E/B/72/2	10.5	8J	240	712	1215/1150	475	BSW	NO
16	205/75R16C	110/108	R	-	E/B/72/2	10.5	6 1/2J	203	714	1060/1000	475	BSW	NO
16	215/75R16C	113/111	R	-	E/B/72/2	10.5	5 1/2J	216	728	1150/1090	475	BSW	NO
16	225/65R16C	112/110	R	-	E/B/72/2	10.5	7J	228	698	1120/1060	475	BSW	NO
16	225/65R16	100	T	-	E/C/72/2	10	5 1/2J	228	698	800	300	BSW	NO
16	215/70R16	100	T	-	E/C/72/2	11	6 1/2J	221	708	800	300	BSW	NO
16	205/65R16	95	T	-	E/C/72/2	10	7J	209	672	690	300	BSW	NO
16	235/65R16	103	T	-	E/C/72/2	10	7 1/2J	240	712	875	300	BSW	NO
16	225/70R16	103	S	-	E/C/72/2	11	6 1/2J	228	722	875	300	BSW	NO
16	225/70R16	103	H	-	E/C/72/2	11	6J	228	722	875	300	BSW	NO
16	235/70R16	106	S	-	E/C/72/2	11	7J	240	736	950	300	BSW	NO
16	235/70R16	106	T	-	E/C/72/2	11	7J	240	736	950	300	BSW	NO
16	215/70R16	100	S	-	E/C/72/2	11	7J	221	708	800	300	BSW	NO
16	245/70R16	107	S	-	E/C/72/2	11	7J	248	750	975	300	BSW	NO
16	245/70R16	107	T	-	E/C/72/2	11	8J	248	750	975	300	BSW	NO
16	245/75R16	111	S	-	E/C/72/2	11	6 1/2J	248	774	1090	300	BSW	NO
16	205/50R16	87	T	-	E/C/71/2	10	7J	214	612	545	300	BSW	YES

Rim	SIZE	LI	SR	XL	Labelling	Tread Depth (mm)	Standard RIM (inch)	Section Width (mm)	Overall Diameter (mm)	Max Load (kg)	Pressure (kpa)	SW	Rim Protector
17	215/60R17	96	T	-	E/C/72/2	10	5 1/2J	221	690	710	300	BSW	NO
17	215/60R17	96	H	-	E/C/72/2	10	5 1/2J	221	690	710	300	BSW	NO
17	225/45R17	94	H	XL	E/C/72/2	10	6 1/2J	225	634	670	340	BSW	YES
17	225/50R17	98	H	XL	E/C/72/2	10	6 1/2J	233	658	750	340	BSW	YES
17	225/60R17	99	T	-	E/C/72/2	10	6 1/2J	228	702	775	300	BSW	NO
17	225/60R17	99	H	-	E/C/72/2	10	7J	228	702	775	300	BSW	NO
17	235/55R17	99	H	-	E/C/72/2	10	6 1/2J	245	690	775	300	BSW	YES
17	235/55R17	99	V	-	E/C/72/2	10	8J	245	690	775	300	BSW	YES
17	265/65R17	112	T	-	E/C/73/2	11	6 1/2J	272	776	1120	300	BSW	NO
17	235/60R17	102	H	-	E/C/72/2	10	6J	240	714	850	300	BSW	NO
17	215/50R17	95	T	XL	E/C/72/2	10	8J	226	648	690	340	BSW	YES
17	235/65R17	104	S	-	E/C/72/2	11	6 1/2J	240	738	900	300	BSW	NO
17	235/65R17	104	T	-	E/C/72/2	11	6 1/2J	240	738	900	300	BSW	NO
17	265/70R17	115	S	-	E/C/73/2	11	6 1/2J	272	804	1215	300	BSW	NO
17	225/65R17	102	S	-	E/C/72/2	11	7J	228	724	850	300	BSW	NO
17	225/65R17	102	T	-	E/C/72/2	11	7J	228	724	850	300	BSW	NO
17	245/65R17	107	S	-	E/C/72/2	11	6 1/2J	248	750	975	300	BSW	NO
17	245/65R17	107	T	-	E/C/72/2	11	6 1/2J	248	750	975	300	BSW	NO
17	215/65R17	99	T	-	E/C/72/2	11	7J	221	712	775	300	BSW	NO
17	215/55R17	94	T	-	E/C/72/2	11	7J	226	668	670	300	BSW	NO
17	225/55R17	97	T	-	E/C/72/2	11	7J	233	680	730	300	BSW	NO
17	215/45R17	91	T	XL	E/C/72/2	10	6 1/2J	213	626	615	340	BSW	YES
17	235/45R17	97	T	XL	E/C/72/2	10	6 1/2J	236	644	730	340	BSW	YES
18	225/40R18	92	H	XL	E/C/72/2	10	6 1/2J	230	637	630	340	BSW	YES
18	235/60R18	103	H	-	E/C/72/2	10	6 1/2J	240	739	875	300	BSW	YES
18	255/55R18	105	H	-	E/C/73/2	10	6J	265	737	925	300	BSW	YES
18	255/55R18	105	V	-	E/C/73/2	10	6J	265	737	925	300	BSW	YES
18	225/60R18	100	T	-	E/C/72/2	10	6 1/2J	228	727	800	300	BSW	YES
18	225/55R18	98	T	-	E/C/72/2	10	5J	233	705	750	300	BSW	YES
18	235/55R18	100	H	-	E/C/72/2	11	7J	245	715	800	300	BSW	NO
18	235/55R18	100	T	-	E/C/72/2	11	7J	245	715	800	300	BSW	NO
18	225/45R18	95	T	XL	E/C/72/2	10	6 1/2J	225	659	690	340	BSW	YES
18	245/45R18	100	H	XL	E/C/72/2	10	6 1/2J	243	677	800	340	BSW	YES
18	235/50R18	101	T	XL	E/C/72/2	10	7J	245	693	825	340	BSW	YES
18	215/55R18	95	T	-	E/C/71/2	10	5J	226	693	690	300	BSW	YES
19	235/55R19	101	H	-	E/C/72/2	10	6 1/2J	245	741	825	300	BSW	YES
19	255/50R19	107	H	XL	E/C/73/2	10	8J	265	739	975	340	BSW	YES
20	275/40R20	106	H	XL	E/C/72/2	11	7J	278	728	950	340	BSW	YES